

CARL MARTIN

Manual



The CARL MARTIN Noise Terminator is a 9V-battery-powered pedal designed to preserve the original tonal characteristics while removing unwanted noise that occurs when multiple effects are used.

The CARL MARTIN Noise Terminator surpasses the performance of conventional noise gates by allowing the player to switch between two threshold settings: Soft - with less noisy equipment: Hard - when more radical settings are required.

The remote jack allows you to connect the Noise Terminator to an external midi switching system, which allows the player to go between the soft and hard settings with ease.

The CARL MARTIN Noise Terminator features an AC adapter jack.

Power Requirements

Battery: The Noise Terminator requires a 9V battery. To replace the battery, carefully remove the back panel by loosening and removing the 4 screws, install the new battery and then re-install the back panel.

Power consumption: max. 12 mA



Power supply: 9 V DC (regulated), 50 mA minimum, 2.1 mm female plug, center negative (-)

ATTENTION: Please Use DC Power Supply Only!

Failure to do so may damage the unit and void the warranty.

Specifications

Input.....	20K Ohm
Output.....	50 Ohm
S/N Ratio.....	87dB
Frequency range.....	20hZ-20kHz
Dimensions	120 (W) x 95 (D) x 56 (H) mm 4.72" (W) x 3.74" (D) x 2.2" (H)
Weight.....	350g / 0,78lbs

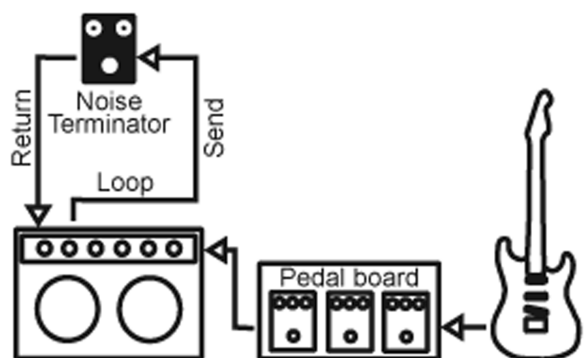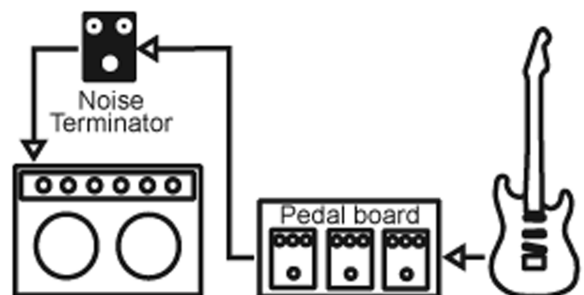

Warranty: Carl Martin Research warrants the manufacturing, material and proper operation for a period of one year from date of purchase. Carl Martin will replace defective parts, make necessary repairs or replace the unit at the discretion of our technicians. The warranty applies only to the original purchaser of this product, and excludes any damage or faulty operation resulting from misuse, neglect or unauthorized service.

HandMade in Denmark

East Sound Research Raadmansvej 24 8500 Grenaa Denmark Phone: +4586325100

E-Mail: info@carlmartin.com